



D.J.
#5 11-19-01
Priority Papers
PATENT
450117-02628

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Besma KRAIEM et al.
Serial No. : 09/598,984
Filed : June 21, 2000
For : CALIBRATION PROCEDURE FOR WIRELESS NETWORKS
WITH DIRECT MODE TRAFFIC
Art Unit : 2731

745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to:
Assistant Commissioner for Patents
Washington, D.C. 20231, on November 13, 2000

Glenn F. Savit, Reg. No. 37,437

Name of Applicant, Assignee or
Registered Representative

Glenn F. Savit

Signature

November 13, 2000

Date of Signature

CLAIM OF PRIORITY

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

In support of the claim of priority under 35. U.S.C.
§ 119 asserted in the Declaration accompanying the above-entitled application, as filed, please find enclosed herewith a certified copy of European Application No. 99 112 129.4, filed in Europe on 23 June 1999 forming the basis for such claim.

THIS PAGE BLANK (USPTO)

PATENT
450117-02628

Acknowledgment of the claim of priority and of the
receipt of said certified copy(s) is requested.



Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicants

By: _____

Glenn F. Savit
Reg. No. 37,437
Tel. (212) 588-0800

Enclosure(s)



THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**



Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99112129.4

Der Präsident des Europäischen Patentamts;
Im Auftrag


For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

04/09/00



THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.: 99112129.4
Demande n°:

Anmeldetag:
Date of filing: 23/06/99
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Sony International (Europe) GmbH
10785 Berlin
GERMANY

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Calibration procedure for wireless networks with direct mode traffic

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

H04L12/56, H04L12/28, H04L29/06

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

The address of the applicant at the time of filing of the
application reads as follows : Hugo-Eckener-Strasse 20, D-50829 Köln.
The registration of the changes has taken effect on 05.04.2000.

THIS PAGE BLANK (USPTO)

MÜLLER & HOFFMANN - PATENTANWÄLTE

European Patent Attorneys - European Trademark Attorneys

Innere Wiener Strasse 17
D-81667 München

Attorney's File: 51.918

Mü/Gö/cg

Applicant's Case: S99P5085EP00/PAE99-066ERDS

23.06.1999

SONY INTERNATIONAL (EUROPE) GMBH

Hugo-Eckener-Str. 20
D - 50829 Köln

**Calibration Procedure for Wireless Networks
with Direct Mode Traffic**

EPO - Munich
52

23. Juni 1999

MÜLLER & HOFFMANN

- 2 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

DescriptionEPO - Munich
52

23. Juni 1999

1 The present invention relates to the calibration procedure for wireless networks with direct mode traffic, and in particular to the creation of a topology map indicating the quality of connectivity of each wireless device of a wireless network with all other wireless devices in said wireless network.

5

A typical wireless network, such as the IEEE 1394 based HIPERLAN type 2 broadband radio access network which specification is developed by ETSI is shown in Fig. 3. An access point or central controller 15 has an up- and down-link communication with several mobile terminals 11, 12, 13, and 14 and the

10 mobile terminals can also have a direct communication in-between each other so that apart from the granting of resources for peer mobile terminals, e. g. the first mobile terminal 11 and the second mobile terminal 12, the access point or central controller 15 is not involved in the communication. Such direct communications in-between two or more mobile terminals are called direct mode.

15 An IEEE 1394 bus with connected network devices is exemplary shown only for the fourth mobile terminal 14.

The problem in wireless networks including direct mode traffic is that the mobile terminals do not know with which other devices they have radio link.

20 Thus, they intend to request the central controller 15 to set up certain connections even though they are not possible. A second problem is the transmit power control during direct mode traffic. Without knowledge about the radio link quality always maximum transmit power levels have to be used until appropriate levels are identified.

25

Therefore, a topology map has been introduced indicating the quality of connectivity of each network device of a wireless network with all other network devices in said wireless network. After distribution of this topology map, a mobile terminal can check whether a connection is possible or not before

30 requesting it with the central controller. Furtheron, transmit power control can be performed using an initial power level determined on the quality of connectivity of the particular radio link.

Also, in case the topology map of the wireless network is not distributed in the whole network, but only stored within the central controller enables the cen-

MÜLLER & HOFFMANN

- 3 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

- 1 tral controller to accept or reject connection requests between two wireless de-
vices depending on the radio link quality. Furthermore, once the topology map
has been created, the central controller can inform the peer wireless devices to
set up their transmit power levels accordingly until accurate transmit power
5 control is performed.

Therefore, it is the object of the present invention to provide a method to
create a topology map indicating the quality of connectivity of each network
device of a wireless network with all other network devices in said wireless
10 network. Furtheron, it is the object of the present invention to provide network
devices that are adapted to work according to the inventive method.

These objects are solved by the inventive method to create a topology map
according to independent claim 1 and network devices for a wireless network
15 according to independent claims 13 and 18. Preferred embodiments thereof are
respectively defined in the respective dependent claims.

A method to create a topology map indicating the quality of connectivity of
each network device of a wireless network with all other network devices in
20 said wireless network according to the present invention comprises the follow-
ing steps: performing a measurement phase in which a calibration signal is
successively broadcasted by each network device and in which all respective
other network devices receiving said calibration signal measure the received
signal quality; performing a reporting phase in which the measurement results
25 are transmitted from each network device to the network device creating said
topology map; and performing a creating phase in which said topology map of
the network is created within the network device creating said topology map on
basis of all received measurement results.

30 Therefore, according to the present invention a very quick creation of the to-
pology map is possible, since no bandwidth is wasted transmitting small
amounts of data, namely single measurement results, from the network
devices that have measured the received signal quality of one control signal to
the network device creating said topology map, but since first all measurement
35 results are collected before they are transmitted to the network device creating
the topology map.

MÜLLER & HOFFMANN

- 4 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

- 1 Preferably said measurement phase and/or said reporting phase are initiated by the network device creating the topology map.

- Further, preferably the topology map is updated when a new network device
5 joins the network and/or after a predetermined amount of time has lapsed.

- A first type of network device for a wireless network according to the present invention is characterized by means to broadcast a calibration signal, to measure a power level of a received calibration signal, and to transmit its measurement results to another network device or to store it internally.
10

- Preferably these functions are carried out on demand of another network device, but they can also be carried out on an internal demand. Therefore, the network device according to the present invention preferably comprises a
15 decoder that initiates the broadcast of a control signal and the measurement of the reception quality of one or more incoming broadcast signals upon reception of a measurement control signal and that further preferably initiates the transmission of one or more measurement results upon reception of a reporting control signal.

20

Preferably the network device according to the present invention is characterized by a report encoder that receives one or more signal quality indication signals and encodes therefrom a signal quality control signal to be transmitted to said other network device or to be stored internally.

25

A second type of network device according to the present invention is characterized by means to initiate a measurement phase, to initiate a reporting phase, and to perform a creation of a topology map on basis of measurement results received during the reporting phase.

30

This second type of network device preferably includes all features of the first type of network device according to the present invention.

- The first type of network device according to the present invention is either a
35 mobile terminal or a mobile terminal having the functionality of a central controller, whereas the second type of network device according to the present invention always has the functionality of a central controller.

MÜLLER & HOFFMANN

- 5 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

1 The present invention and its numerous embodiments will be better understood on basis of the following exemplary description thereof taken in conjunction with the accompanying drawings, in which

- 5 **Fig. 1** shows a network device according to the present invention;
Fig. 2 shows the messaging in-between the central controller and two mobile terminals during the calibration procedure to create the topology map; and
Fig. 3 shows an exemplary wireless network.

10

The mobile terminal shown in Fig. 1 is adapted to perform a direct mode calibration according to the present invention. The shown mobile terminal has one antenna 1 which is connected to the movable terminal of a transmit/receive selection switch 2 which fixed terminals are respectively connected to the
15 transmitter and receiver signal path of the mobile terminal. In the receiver signal path a receiver 3 is directly connected to the respective fixed terminal of the transmit/receive selection switch 2. This receiver 3 produces a data and control signal input to a controller 6 and also outputs a signal wherefrom a signal quality measurement unit 5 can determine the received signal strength
20 which is output to the controller 6. For the transmitter signal path the controller 6 outputs a data and control signal to a transmitter 4 which modulates, up-converts and amplifies this signal to a given signal strength which is indicated to the transmitter 4 by a control signal generated by the controller 6 and outputs the generated transmission signal to the respective fixed terminal of
25 the transmit/receive selection switch 2. Bi-directionally connected to the controller are a user interface 7 and a memory 8. Furtheron, the controller 6 is connected to a direct mode calibration decoder 9 and a direct mode report encoder 10.

- 30 The direct mode calibration decoder 9 receives the control signals generated by the receiver 3 via the controller 6 and initiates the broadcast of a calibration signal and the measurement of the reception quality of one or more incoming broadcasted calibration signals from other mobile terminals upon reception of a measurement control signal which is transmitted from the central controller
35 15. Furtheron, upon reception of a reporting control signal which is also transmitted from the central controller 15 the direct mode calibration decoder 9 initiates the transmission of one or more measurement results to said central

MÜLLER & HOFFMANN

- 6 -

SONY INTERNATIONAL (EUROPE) GMBH

51.918

23.06.1999

1 controller 15. Therefore, all measurement results stored within the memory 8
are communicated to the direct mode report encoder 10 by the controller 6 and
said direct mode report encoder 10 generates a signal quality control signal
that is transmitted via the controller 6 and the transmitter 4 to the central
5 controller 15. The central controller 15 creates a topology map on basis of all
measurement results received from all mobile terminals during the reporting
phase.

In the following the calibration procedure will be described in connection with
10 Fig. 2 which shows the messaging in-between the central controller 15 having
a medium access control identifier, i. e. MAC-ID3, and a first mobile terminal
11 having a MAC-ID1 and a second mobile terminal 12 having a MAC-ID2,
after the calibration procedure is decided to be started, since either a new mo-
bile terminal joins the network or a timer has expired.

15

In a first step S1 the central controller 15 send measurement control signals
to both mobile terminals 11 and 12. Of course, the central controller 15 itself
knows that the measurement phase of the calibration procedure will be per-
formed. Therefore, after the first step S1 all three network devices, namely the
20 central controller 15 and the first and second mobile terminals 11 and 12, are
initialized to perform the measurement phase. During the measurement phase
all network devices within the wireless network successively broadcast a cali-
bration signal and receive the calibration signals transmitted by the other net-
work devices to determine their respective signal quality. Therefore, in a step
25 S2 the first mobile terminal 11 broadcasts its calibration signal to the central
controller 15 and the second mobile terminal 12 which receive said calibration
signal, measure its signal quality, and store it in an internal memory.

Thereafter, the central controller 15 itself performs the broadcast of a calibra-
30 tion signal to the first and second mobile terminals 11 and 12 in a step S3.
Both mobile terminals 11 and 12 respectively receive the calibration signal,
measure its signal quality and store this value in an internal memory. Follow-
ing in a step S4 the second mobile terminal 12 also broadcasts a calibration
signal to the first mobile terminal 11 and the central controller 15 which
35 respectively receive this calibration signal, measure its signal quality and store
this measured value in an internal memory. After all mobile terminals have
broadcasted their calibration signals and these calibration signals are received

MÜLLER & HOFFMANN

- 7 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

1 and measured by all respective other devices, the central controller 15 transmits a reporting control signal in a step S5 to the first mobile terminal 11 and the second mobile terminal 12. After reception of the reporting control signal, both mobile terminals generate a signal quality control signal comprising one
5 or more measurement results and transmit it respectively to the central controller 15. The first mobile terminal 11 transmits its signal quality control signal in a step S6 to the central controller 15 and the second mobile terminal 12 transmits its signal quality control signal to the central controller 15 in a step S7.

10

Of course, the central controller 15 knows its own measurement results, since they are already stored in its internal memory. Upon reception of all measurement results from all other mobile terminals within the network, the central controller 15 generates the topology map which indicates the reception quality
15 for every radio link available within the network.

To summarize the above procedure it can be said that the calibration procedure mainly consists of two phases, namely the measurement phase and the reporting phase. In an exemplary embodiment of an IEEE 1394 based HIPER-
20 LAN type 2 network during the measurement phase the calibration slot is transmitted using a dedicated control channel. It contains the source identifier. The calibration slot is transmitted using the maximum allowed transmit power level in order to avoid artificial hidden nodes. Each other wireless device measures the received quality, e. g. by means of the received signal strength
25 and stores it in an internal memory. During the reporting phase each wireless device reports its measurement results to the central controller using a dedicated control channel. The report slot contains the identifier of the wireless device and the report measurements. One or more measurement results can be transmitted in one report slot.

30

Once all wireless devices have reported their measurement results to the central controller, the central controller (in a third phase) creates a topology map of the network which indicates the quality of connectivity of each wireless device with all others. A possible topology map of a network with n active devices
35 represented into a matrix is shown below:

MÜLLER & HOFFMANN

- 8 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

| | | | | | | | | |
|----|----------------|----------------|----------------|----------------|-----|-----|-----|----------------|
| 1 | | MAC-ID1 | MAC-ID2 | MAC-ID3 | ... | ... | ... | MAC-IDn |
| | MAC-ID1 | | RSS 1-2 | RSS 1-3 | ... | ... | ... | RSS 1-n |
| | MAC-ID2 | RSS 2-1 | | RSS 2-3 | ... | ... | ... | RSS 2-n |
| 5 | MAC-ID3 | RSS 3-1 | | | ... | ... | ... | RSS31-n |
| | ... | ... | ... | ... | | ... | ... | ... |
| | ... | ... | ... | ... | ... | | ... | ... |
| | ... | ... | ... | ... | ... | ... | | ... |
| 10 | MAC-IDn | RSS n-1 | RSS n-2 | RSS n-3 | ... | ... | ... | |

RSS n-m represents the received signal strength at mobile terminal n when
 transmitted by mobile terminal m. The central controller is also regarded as
 mobile terminal, since in a wireless network environment with mobile termi-
 nals the task of the central controller might be switched from one mobile ter-
 minal to another. According to the example shown hereinafter 4 bits are used
 to map the received signal quality, i. e. the received power to a signal strength
 code. Therefore, there exist sixteen possibilities of designated received power
 levels to be included in the topology map. According to the shown example, a
 bandwidth of < -90 dBm to > -30dBm is set with a step size of 3 dB and a
 range of -69 dBm to -48 dBm as a medium range mapped to one coding value.

MÜLLER & HOFFMANN

- 9 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

| | | | |
|----|-------------|--|------------------|
| 1 | RSS2 | Received Power at ARP [dBm] | Step Size |
| | 0000 | < -90 dBm (no radio link) | |
| 5 | 0001 | -90 | 3 dB |
| | 0010 | -87 | |
| | 0011 | -84 | |
| | 0100 | -81 | |
| | 0101 | -78 | |
| 10 | 0110 | -75 | |
| | 0111 | -72 | |
| | 1000 | -69 ... -48 | 21 dB |
| | 1001 | -45 | 3 dB |
| 15 | 1010 | -42 | |
| | 1011 | -39 | |
| | 1100 | -36 | |
| | 1101 | -33 | |
| | 1110 | -30 | |
| 20 | 1111 | > -30 dBm | |

Of course, any other mapping e. g. in a strictly linear or non-linear fashion can be performed as well.

25

An update of the topology map is always triggered by the central controller. It is started as a high priority calibration when a new mobile terminal joins the network so that an updated topology map is nearly immediately created, e. g. within 2 ms. Furtheron, a low priority calibration is started every time when a timer expires, e. g. every 100 ms. Low priority in this sense means that the calibration is carried out every time free resources are available.

30

The topology map of the network might be broadcast by the central controller to all mobile terminals and depending on the used system it might be transmitted as a whole or line by line. A mobile terminal receiving the topology map preferably stores this topology map together with a time stamp. Another possibility to give knowledge about the network topology to a mobile terminal is to

35

MÜLLER & HOFFMANN

- 10 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

- 1 just transmit a particular line or value of the topology map to the corresponding network device.

- Of course, the present invention is not only to be used with an IEEE 1394
5 based HIPERLAN type 2 network, but with any wireless network, preferably with such supporting direct mode.

10

15

20

25

30

35

MÜLLER & HOFFMANN

- 11 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

ClaimsEPO - Munich
52

23. Juni 1999

- 1 1. Method to create a topology map indicating the quality of connectivity of each network device of a wireless network with all other network devices in said wireless network, **characterized by** the following steps:
- 5 - performing a measurement phase in which a calibration signal is successively broadcasted by each network device and in which all respective other network devices receiving said calibration signal measure the received signal quality;
- 10 - performing a reporting phase in which the measurement results are transmitted from each network device to the network device creating said topology map; and
- performing a creating phase in which said topology map of the network is created within the network device creating said topology map on basis of all received measurement results.
- 15 2. Method according to claim 1, **characterized in** that said calibration signal is transmitted in a dedicated control channel.
- 20 3. Method according to claim 1 or 2, **characterized in** that said measurement results are reported in a respective dedicated control channel.
- 25 4. Method according to anyone of the preceding claims, **characterized in** that said calibration signal is transmitted with the maximum allowed transmit power level.
- 30 5. Method according to anyone of the preceding claims, **characterized in** that said topology map is updated when a new network device joins the network.
6. Method according to anyone of the preceding claims, **characterized in** that said topology map is updated after a predetermined amount of time.
7. Method according to anyone of the preceding claims, **characterized in** that said topology map is stored in the central controller.

MÜLLER & HOFFMANN

- 12 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

- 1 **8.** Method according to anyone of the preceding claims, **characterized in**
that said topology map is broadcasted in the whole network.
- 5 **9.** Method according to anyone of claims 1 to 7, **characterized in** that only
the parts of the topology map related to a specific network device are transmit-
ted to said specific network device.
- 10 **10.** Method according to anyone of the preceding claims, **characterized in**
that said calibration signal is transmitted using an omni-directional antenna.
- 10 **11.** Method according to anyone of the preceding claims, **characterized in**
that the contents of the topology map are codes that are mapped to receive
power values.
- 15 **12.** Method according to anyone of the preceding claims, **characterized in**
that said measurement phase and/or reporting phase is initiated by the net-
work device creating said topology map.
- 20 **13.** Network device for a wireless network, **characterized by** means to
broadcast a calibration signal, to measure a power level of a received calibra-
tion signal, and to transmit its measurement results to another network device
or to store it internally.
- 25 **14.** Network device according to claim 13, **characterized in** that said func-
tions are performed on demand of another network device or on an internal
demand.
- 30 **15.** Network device according to claim 13 or 14, **characterized by** a calibra-
tion decoder (9) that initiates the broadcast of a calibration signal and the
measurement of the reception quality of one or more incoming calibration sig-
nals upon reception of a measurement control signal.
- 35 **16.** Network device according to claim 15, **characterized in** that said cali-
bration decoder (9) initiates the transmission of one or more measurement re-
sults upon reception of a reporting control signal.

MÜLLER & HOFFMANN

- 13 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

1 **17.** Network device according to anyone of claims 13 to 16, **characterized**
by a report encoder (10) that receives one or more signal quality indication sig-
nals and encodes therefrom a signal quality control signal to be transmitted to
said other network device.

5

18. Network device for a wireless network, **characterized by** means to initi-
ate a measurement phase, to initiate a reporting phase and to perform a crea-
tion of a topology map on basis of measurement results received during the
reporting phase.

10

19. Network device according to claim 18 including the features of anyone of
claims 16 to 20.

15

20

25

30

35

THIS PAGE BLANK (USPTO)

MÜLLER & HOFFMANN

- 14 -

SONY INTERNATIONAL (EUROPE) GMBH

File: 51.918

23.06.1999

Abstract**Calibration Procedure for Wireless Networks
with Direct Mode Traffic**EPO-Munich
52

23. Juni 1999

A calibration procedure of wireless networks to create a topology map mainly consists of two phases: a measurement phase during which each wireless device, i. e. all mobile terminals and the central controller, transmits a calibration signal in broadcast mode (S2, S3, S4) and each other wireless device measures the received signal quality and the reporting phase during which each mobile terminal reports the measured results to the central controller of the network (S6, S7). Both of these phases are preferably initiated by the central controller, the measurement phase with the broadcast of a measurement control signal to all mobile terminals (S1) and the reporting phase with the broadcast of a reporting control signal to all mobile terminals (S5). Based on all measurement results the central controller creates a topology map of the network once all reports have been received. This topology map is updated in two cases, namely when a new device joins the network with a high priority calibration and when a timer expires with a low priority calibration, i. e. only when there are enough free resources.

(Fig. 2)

THIS PAGE BLANK (USPTO)

EPO - Munich
52

23. Juni 1999

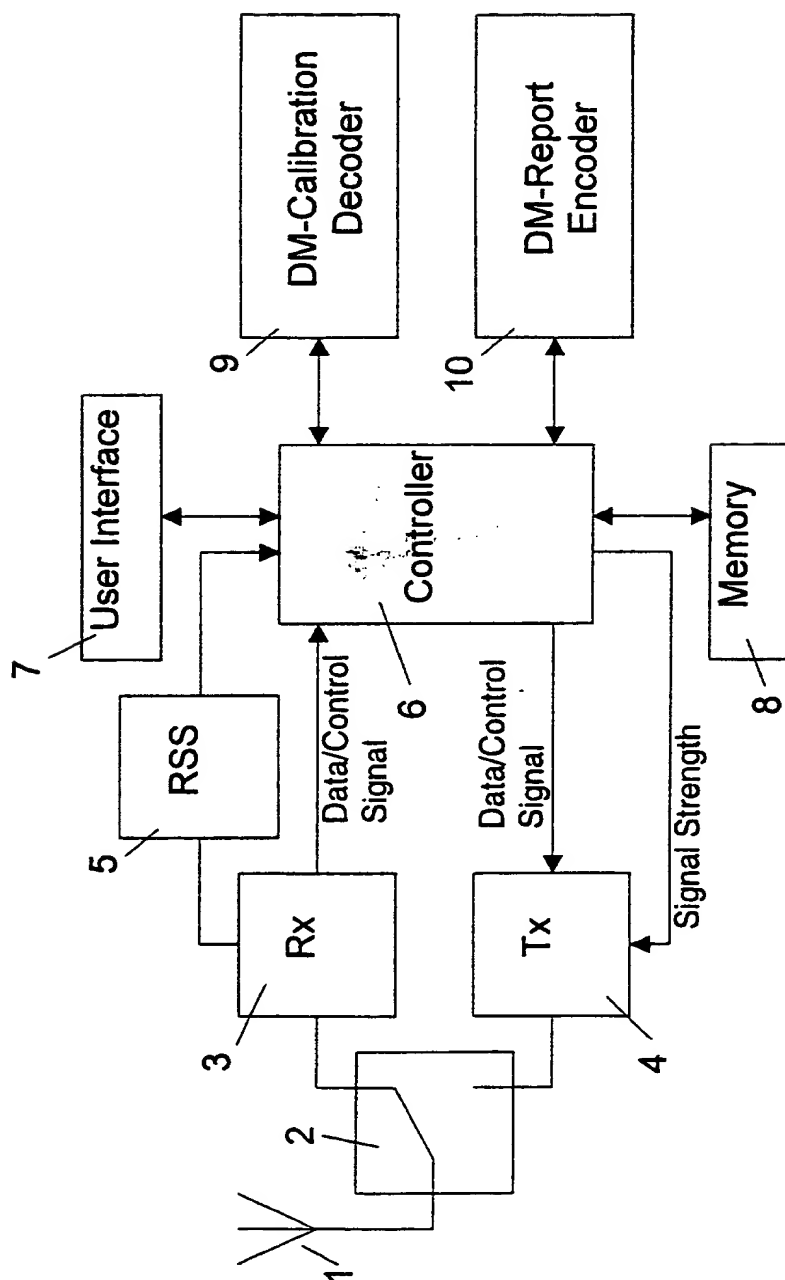


Fig. 1

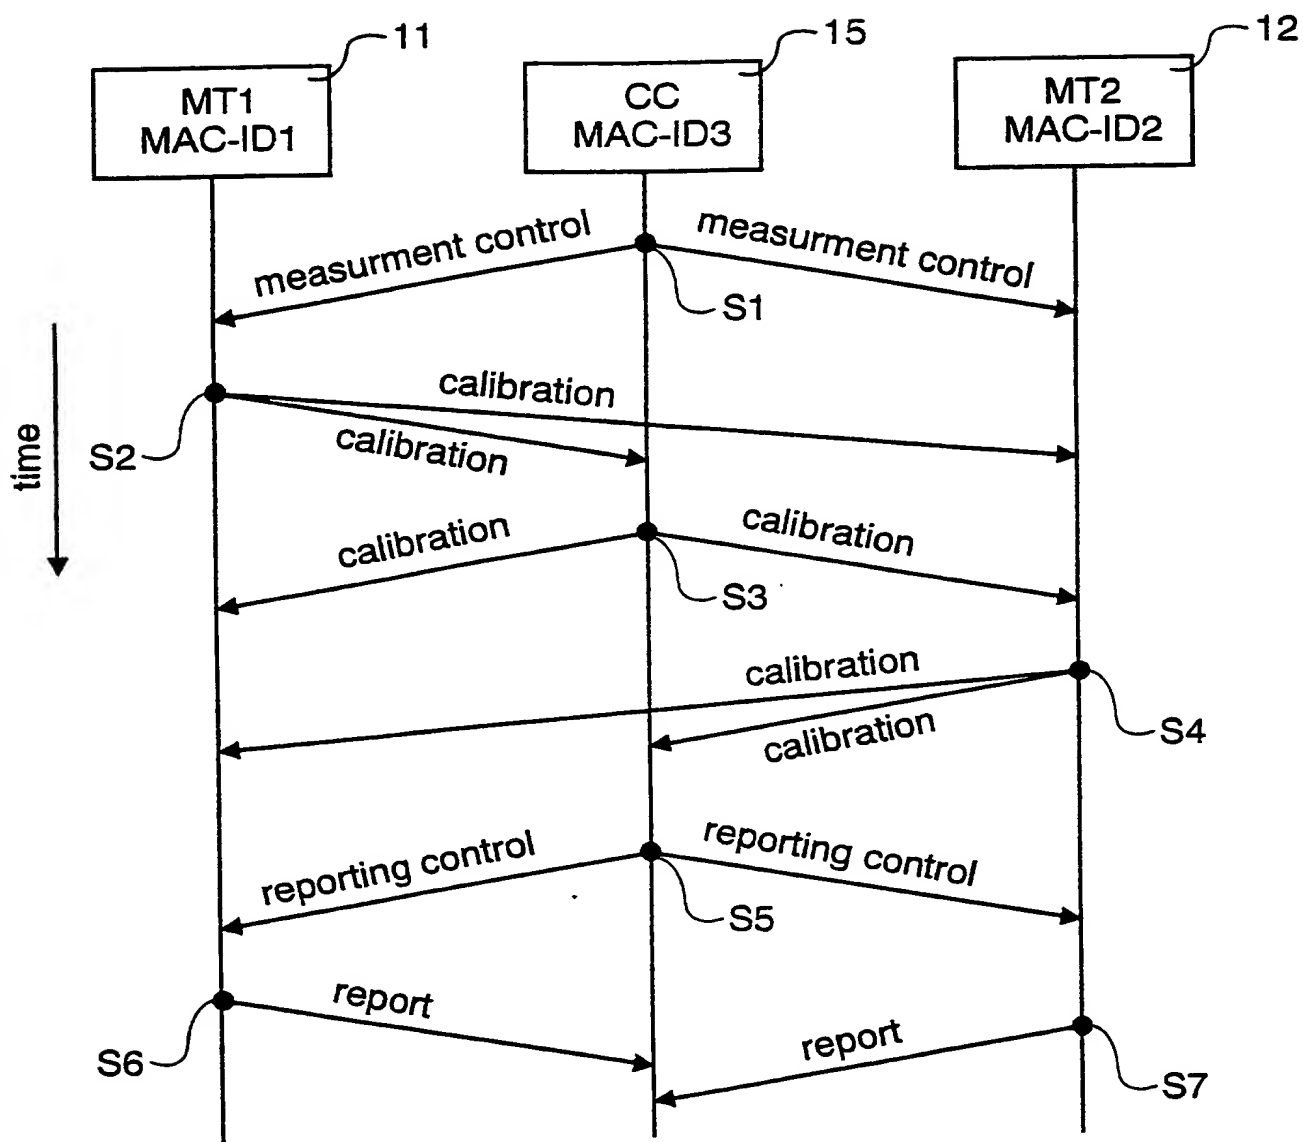


Fig. 2

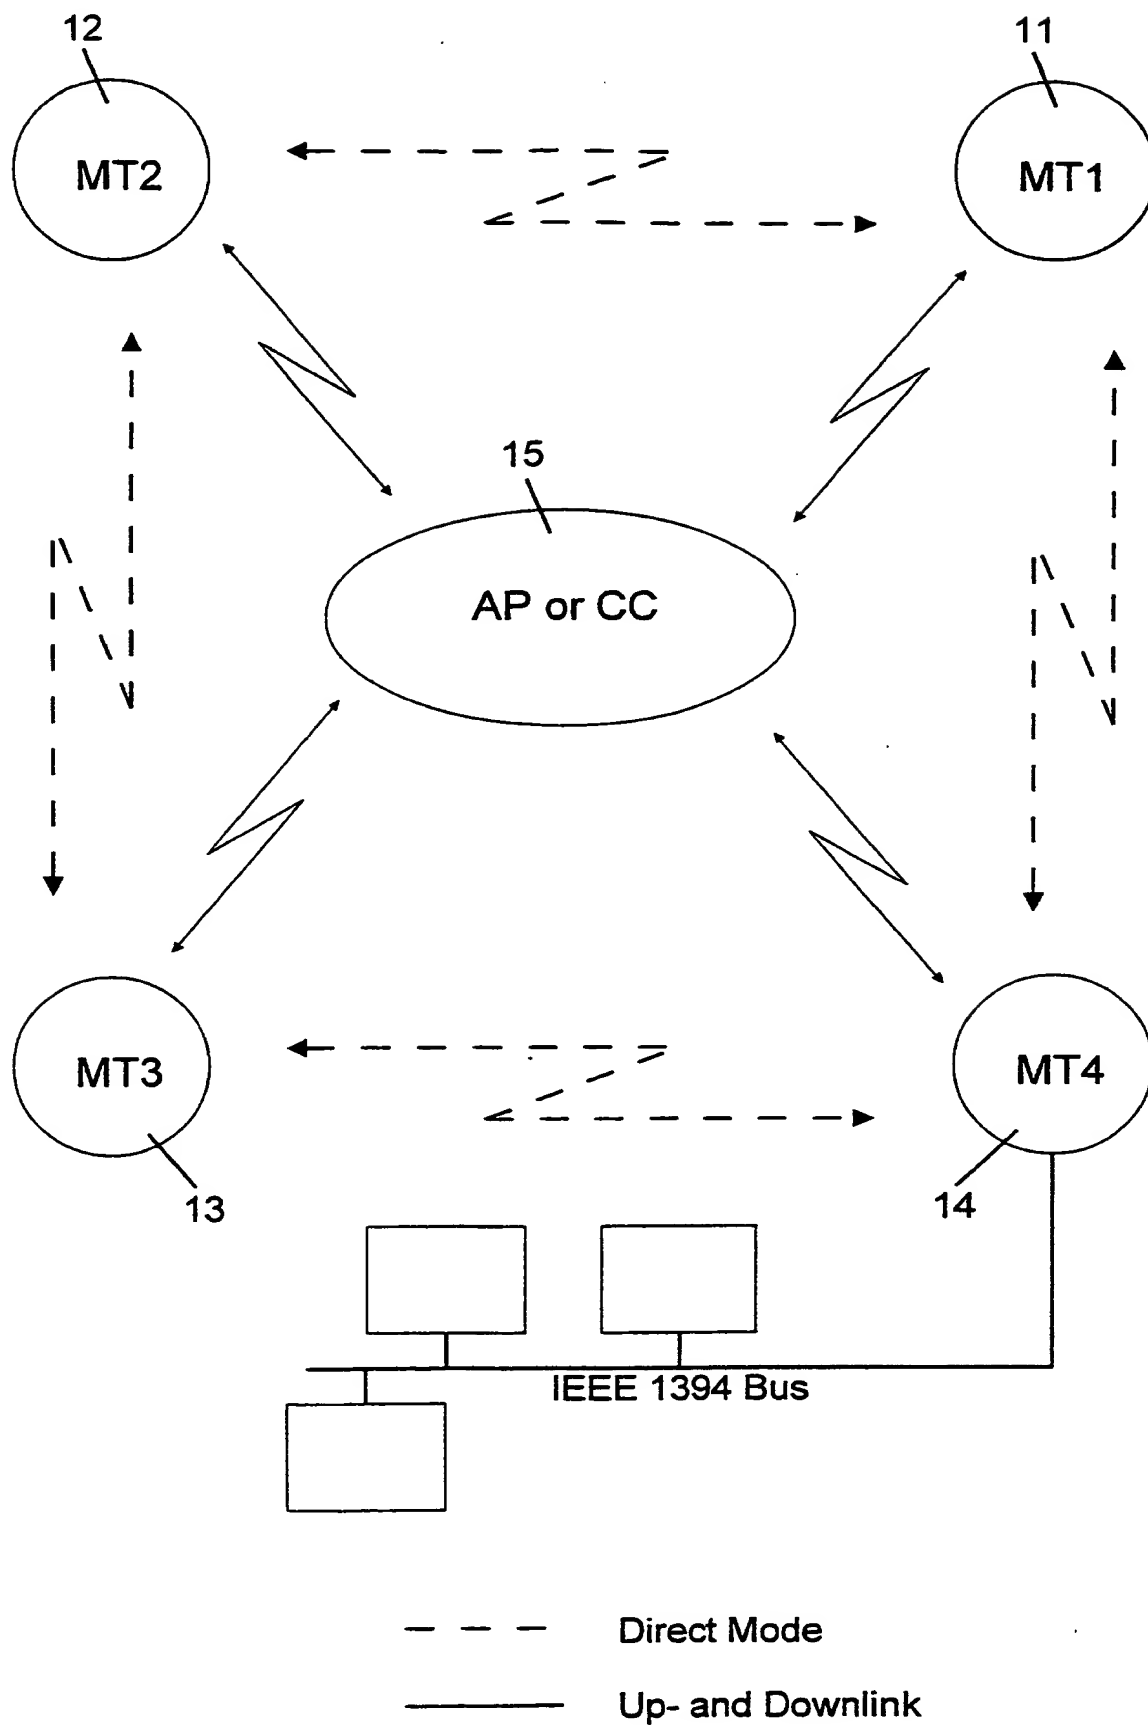


Fig. 3

THIS PAGE BLANK (USPTO)